

CONECTORES ELECTRICOS PARA SUBESTACIONES


ALUMINIO ANTICORONA para conductores AL o bimetálicos AL-CU



SFC-AA

SOPORTES CABLE SOBRE AISLADOR


MODELO	CONDUCTORES		CP CIRC. PERNO	DIMENSIONES	
	MINIMO	MAXIMO		H	J PERNO (MM)
SFC-423AA	25	28	3" (76)	---	1/2" (12)
SFC-425AA			5" (127)		5/8" (16)
SFC-427AA			7" (178)		1/2" (12)
SFC-543AA	30	35	3" (76)	---	1/2" (12)
SFC-545AA			5" (127)		5/8" (16)
SFC-547AA			7" (178)		1/2" (12)
SFC-563AA	35	37	3" (76)	---	1/2" (12)
SFC-565AA			5" (127)		5/8" (16)
SFC-567AA			7" (178)		1/2" (12)
SFC-643AA	37	41	3" (76)	---	1/2" (12)
SFC-645AA			5" (127)		5/8" (16)
SFC-647AA			7" (178)		1/2" (12)

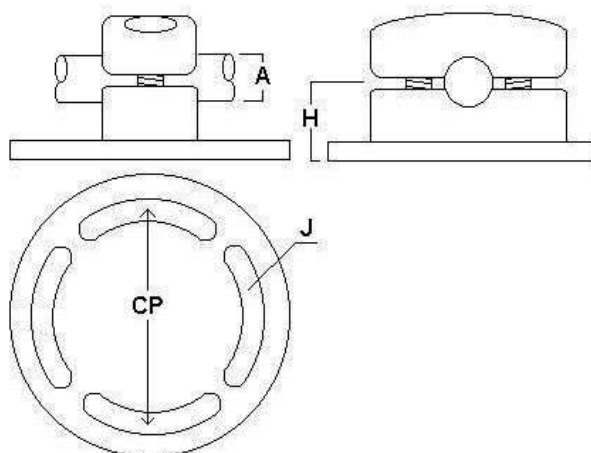

SFCR-AA

SOPORTES CABLE SOBRE AISLADOR

MODELO	CONDUCTORES		CP CIRC. PERNO	DIMENSIONES	
	MINIMO	MAXIMO		H	J PERNO (MM)
SFCR-423AA	25	28	3" (76)	---	1/2" (12)
SFCR-425AA			5" (127)		5/8" (16)
SFCR-427AA			7" (178)		1/2" (12)
SFCR-543AA	30	35	3" (76)	---	1/2" (12)
SFCR-545AA			5" (127)		5/8" (16)
SFCR-547AA			7" (178)		1/2" (12)
SFCR-563AA	35	37	3" (76)	---	1/2" (12)
SFCR-565AA			5" (127)		5/8" (16)
SFCR-567AA			7" (178)		1/2" (12)
SFCR-643AA	37	41	3" (76)	---	1/2" (12)
SFCR-645AA			5" (127)		5/8" (16)
SFCR-647AA			7" (178)		1/2" (12)

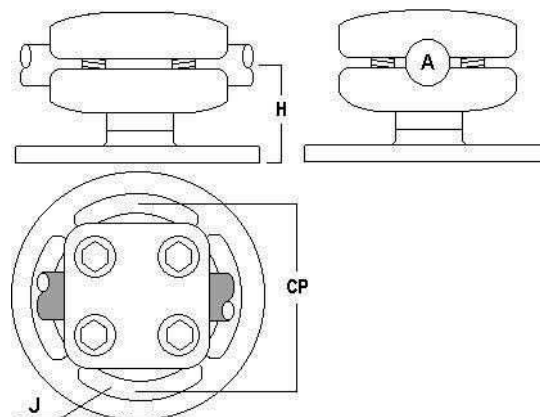

Notas: